

SUN CONEC




Premium ferrule & Super premium

No need to adjust fiber orientation.

Achieves IEC Grade B


or higher optical performance.

flange width:
1.27mm
1.3mm
1.35mm

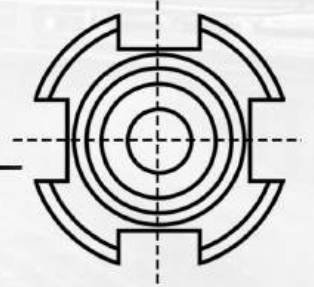

Ferrule diameter tolerance: **$\pm 0.2\mu\text{m}$**
Customizable based on fiber outer diameter


concentricity depth

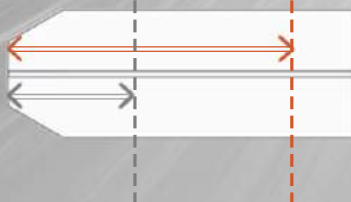

others
50 μm

ours
200 μm


outer diameter

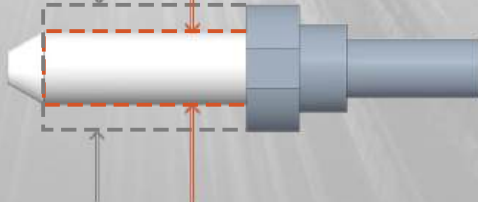

others od
 $\pm 0.5\text{mm}$

ours od
 $\pm 0.2\text{mm}$

angle of axis

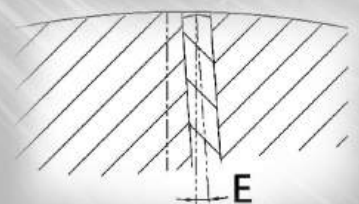

others:
 $E \leq 0.2^\circ$

ours:
 $E \leq 0.1^\circ$

A collection of various fiber optic connectors and cables, including SC/APC, SC/UPC, LC/APC, LC/UPC, FC/APC, FC/UPC, E2000/APC, DIN, MU, LX.5, and ST/UPC.

A histogram showing the frequency of correct answers. The x-axis represents the number of correct answers (0.000 to 0.180) and the y-axis represents frequency (0 to 100). A normal distribution curve is overlaid on the histogram bars.

A histogram showing the frequency of the number of children per family. The x-axis represents the number of children (0 to 18) and the y-axis represents the frequency (0 to 100). A normal distribution curve is overlaid on the histogram, peaking at approximately 100 for 6 children.

Data performance :
Average < 0.07db,
100% < 0.2db,
97% < 0.15db