


SUN CONEC



LC-WHOOSH

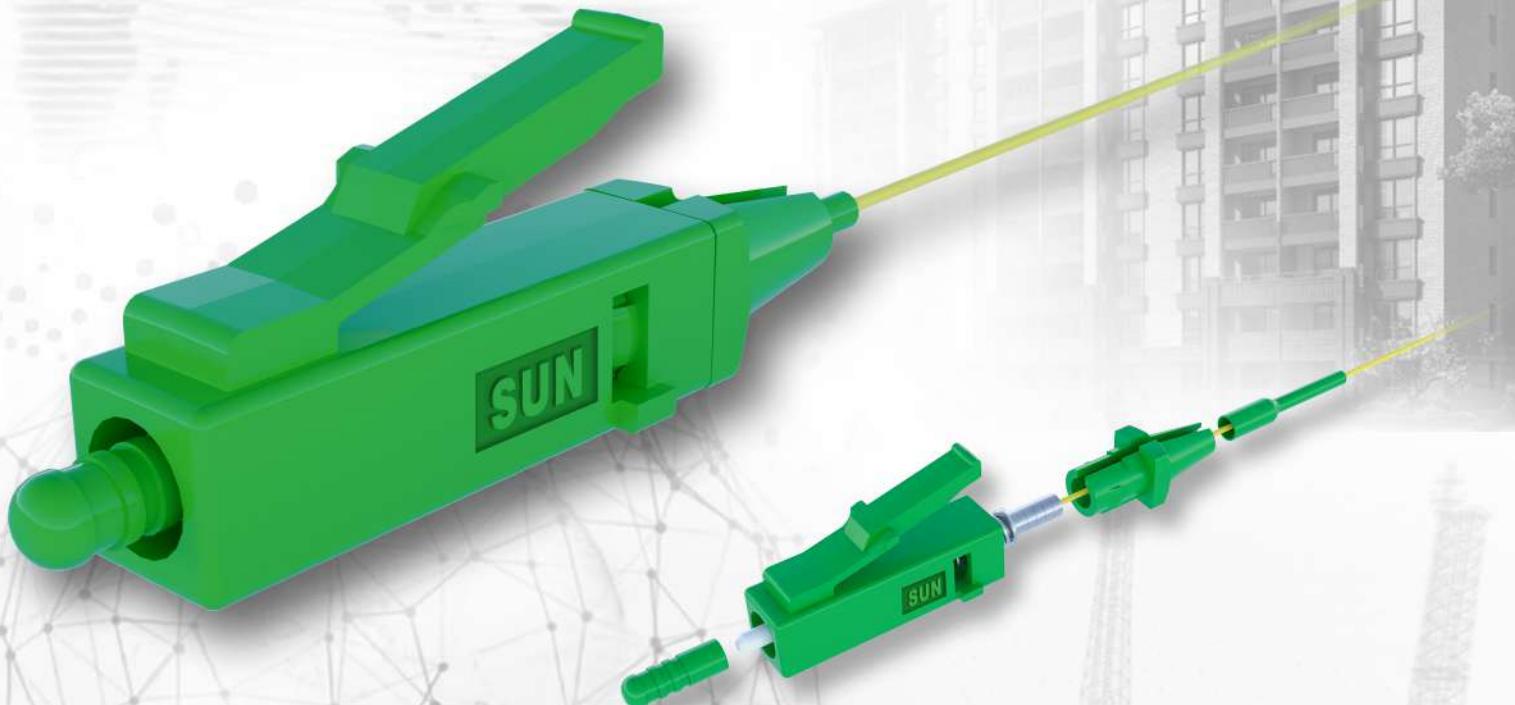

COMPACT SIZE

single-core outer diameter $\leq 2.5\text{mm}$

combined outer diameter of 4 LC connectors $\leq 3.0\text{mm}$

Suitable for tubes with an inner diameter of $\leq 4\text{mm}$

All products can meet IEC Grade B standards.



reel packaging is convenient to access and install



Tensile strength: 400N




connector housing can be assembled in less than 15s




pass through a minimum inner diameter of 4mm.

How to install:


1.

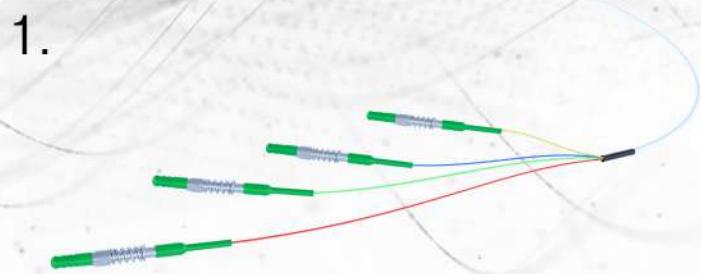


2.

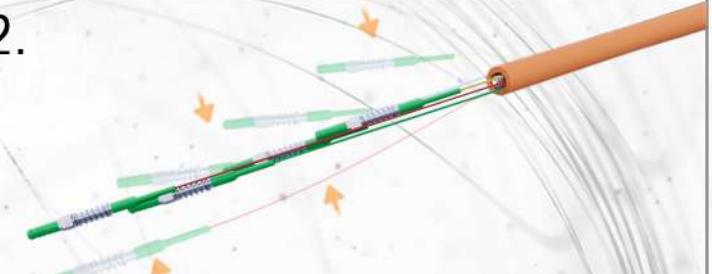

3.

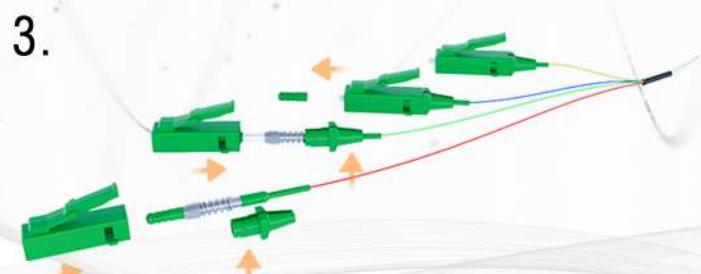

4.

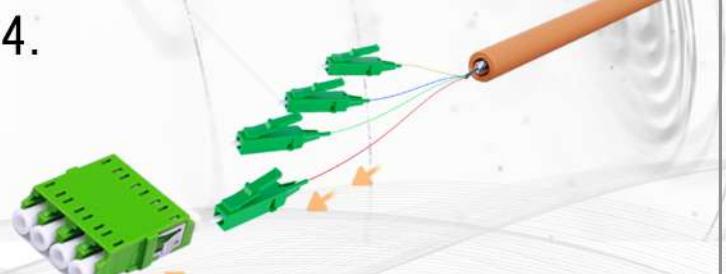

 Sales Office: 31 ROCHESTER DRIVE #24-00 PARK AVENUE ROCHESTER SINGAPORE 138637

 Production Base: 4 jalan Tiram Seiahtera 1, Taman Perindustrian Tiram Seiahtera 81800, Ulu Tiram, Johor, Malaysia

 E-mail: official@suncnec.com

 www.suncnec.com

